Part Number: iSFP-10G-LRM

Quick Spec:

Manufacturer Compatibility:	Alcatel-Lucent
Form Factor:	SFP+
TX Wavelength:	1310nm
Reach:	300m
Cable Type:	MMF
Rate Category:	10GBase
Interface Type:	LRM
Digital Optical Mon. (DOM):	True
Connector Type:	Dual-LC

Features

- Operating Data Rate up to 10.3Gbps
- 1310nm DFB-LD Transmitter
- Reach:
  - OM1 (62.5/125micron) 220m
  - OM2 (50/125micron 400 MHz*km) 100m
  - OM3 (50/125micron 500 MHz*km) 220m
  - G.652 (9/125micron singlemode) 300m
- Single 3. 3V Power Supply and TTL Logic Interface
- Hot Pluggable
- Operating Case Temperature: Standard: 0℃~+70℃ Industrial: -40℃~+85℃
- Compliant with MSA SFP+ Specification SFF-8431
- Compliant with IEEE 802.3ae 10GBASE-LR
- Compliant with IEEE 802.3ae 10GBASE-LW
- Compliant with SFF-8472
- RoHS 6 Compliant

Applications

- 10GBASE-LR at 10.3125Gbps
- 10GBASE-LW at 9.953Gbps
- Other Optical Links

Specification

Electrical Characteristics (Condition: Ta=TOP)

Parameter	Symbol	Min.	Typ	Max.	Unit	Notes
CML Inputs(Differential)	Vin	150		1200	mV p-p	AC coupled inputs
Supply Current	ICC			300	mA	
Input Impedance (Differential)	Zin	85	100	115	ohm	Rin > 100 kohm @ DC
Tx_Disable Input Voltage – Low	VIL	0		0.8	V	
Tx_Disable Input Voltage – High	VIH	2.0		3.45	V	
Tx_Fault Output Voltage – Low	VOL	0		0.5	V	

Tx_Fault Output Voltage – High	VOH	2.0		Vcc+0.3	V	
CML Outputs (Differential)	Vout	350		700	mV pp	AC coupled outputs
Output Impedance (Differential)	Zout	85	100	115	ohms	
Rx_LOS Output Voltage- Low	VOL	0		0.5	V	
Rx_LOS Output Voltage- High	VOH	2.5			V	

Optical Characteristics (Condition: Ta=TOP)

TX

Parameter		Symbol	Min	Typ	Max	Unit
Data Rate			-	10.3	-	Gb/s
9µm Core Diameter SMF				10		Km
Centre wavelength		λc	1270	1310	1355	nm
Output Spectral Width(-20dB)		Δλ	-	-	1	nm
Average Output Power		P_{out}	-8	-	+0.5	dBm
Extinction Ratio		ER	3.5	-	-	dB
Average Power of OFF Transmitter					-30	dBm
Side Mode Suppression Ratio		SMSR	30			dB
Input Differential Impedance		Zin	90	100	110	Ω
TX Disable	Disable		2.0		Vcc+0.3	V
	Enable		0		0.8	
TX Fault	Fault		2.0		Vcc+0.3	V
	Normal		0		0.8	
TX Disable Assert Time		t_off			10	us

RX

Parameter	Symbol	Min	Typ	Max	Unit
Center Wavelength	λc	1260		1565	nm
Receive Sensitivity	P_{in}	-	-	-14	dBm
Maximum Input Power	P_{MAX}	-3	0	-	dBm
Signal Detect Threshold-Assertion:	SD_{HIGH}	-	-	-15	dBm

Signal Detect Threshold-Deassertion:		SD_{LOW}	-25	-	-	dBm
Output Differential Impedance		Pin	90	100	110	Ω
Receiver Overload		Pmax	0.5			dBm
Optical Return Loss		ORL			-12	dB
LOS	High	2.0			Vcc+0.3	V
	Low	0			0.8	

Absolute Maximum Ratings (T_C=25℃)

Parameter	Symbol	Min	Max	Unit
Storage Temperature	T_{ST}	-40	+85	℃
Operating Temperature (Com)	T_{IP}	0	+70	℃
Operating Temperature (Ext)		-40	+85	
Input Voltage	T_{CC}	0	5	V

Recommend Operation Environment

Parameter	Symbol	Min	Typ	Max	Unit
Supply Voltage	V_{CC}	+3.15	3.3	+3.45	V
Operating Temperature	T_{OP}	0	-	+70	℃
Operating Temperature		-40	-	+85	

Mechanical Drawing

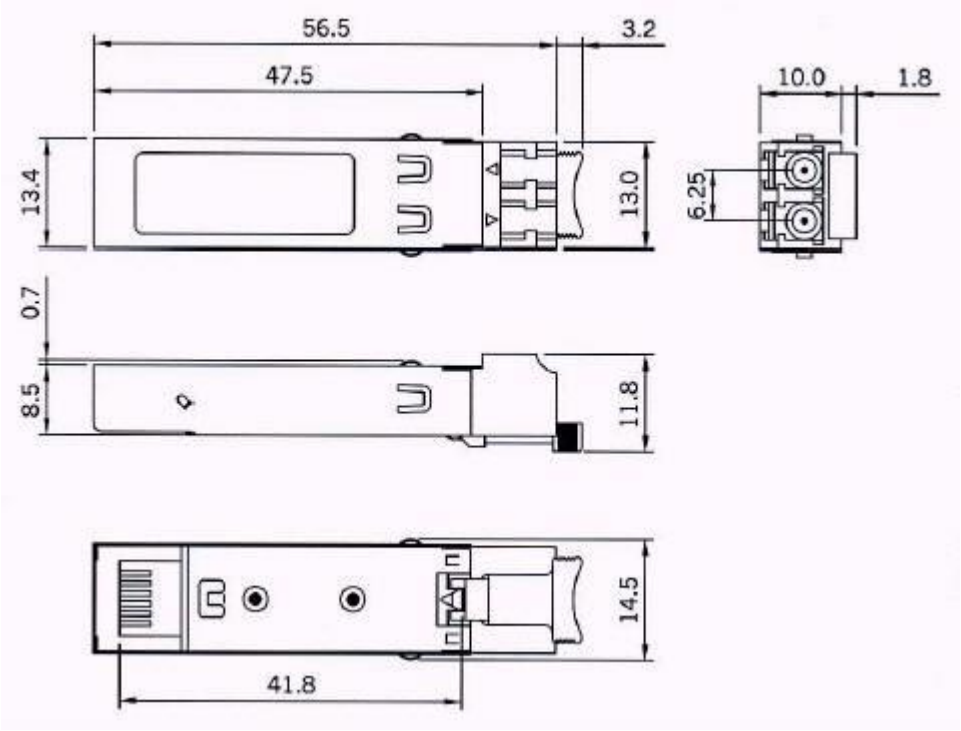

Dimensions

Dimensions (H x W x D):8.5 x 13.4 x 56.5 mm